




BENSAN

DISTRIBUTION

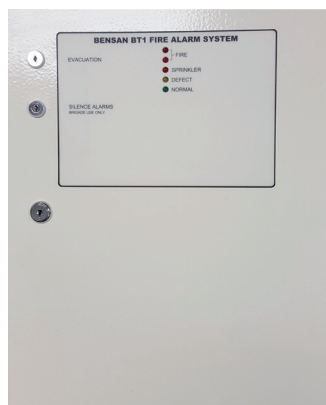

BT1

BT1 SINGLE ZONE FIRE ALARM PANEL

Optional Pulsed siren output when smoke detector activated, which allows standard sounders to generate a distinctive sound when a smoke detector activates. Separate indication for heat detector/mcp, smoke detector and Sprinkler activation

Capable of monitoring 40 conventional smoke detectors and practically unlimited number of indicating MCP and indicating heat detectors (limited by zone size).

- On-board monitored Sprinkler/DBA input
- On-board Auxiliary Fire Relay output, with Aux isolate switch.
- On-board defect opto output (available when no SGD fitted)
- Walk Test facility
- 2 Sounder circuits
- Optional smoke reset facility.

Large sturdy cabinet which accommodates a standard alarm test book.

BT1 Technical Specification

Max Sounder Load	3A
Dimensions	320mm(W) x 390mm(H) x 110mm(D)
SGD capable	Yes
Product Approvals	NZS4512:2003
FPA listing number	BS/105