

SPS Truflo 100mm & 150mm RWO with Class D Heavy-Duty Flat Grate


Specification codes:

TIA100F (100mm CI body, galvanised flat grate)
TIA150F (150mm CI body, galvanised flat grate)
TBS100F (100mm bronze body, 316SS flat grate)
TBS150F (150mm bronze body, 316SS flat grate)
- for 80mm outlet, use "100/80" instead of "100"

Suggested applications:

Car park decks
Plant rooms


Flat grate in heavy duty,
hot-dipped galvanised
mid-carbon steel or 316
stainless steel

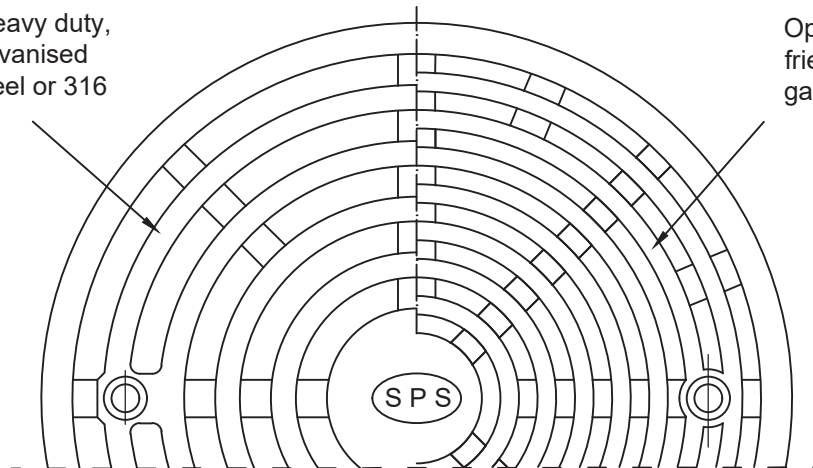

Optional high-heel
friendly pattern (6mm
gaps) use suffix -F

Load-tested to Class D of AS3996-2006

Integral puddle
flange with
weep holes 4 x
places

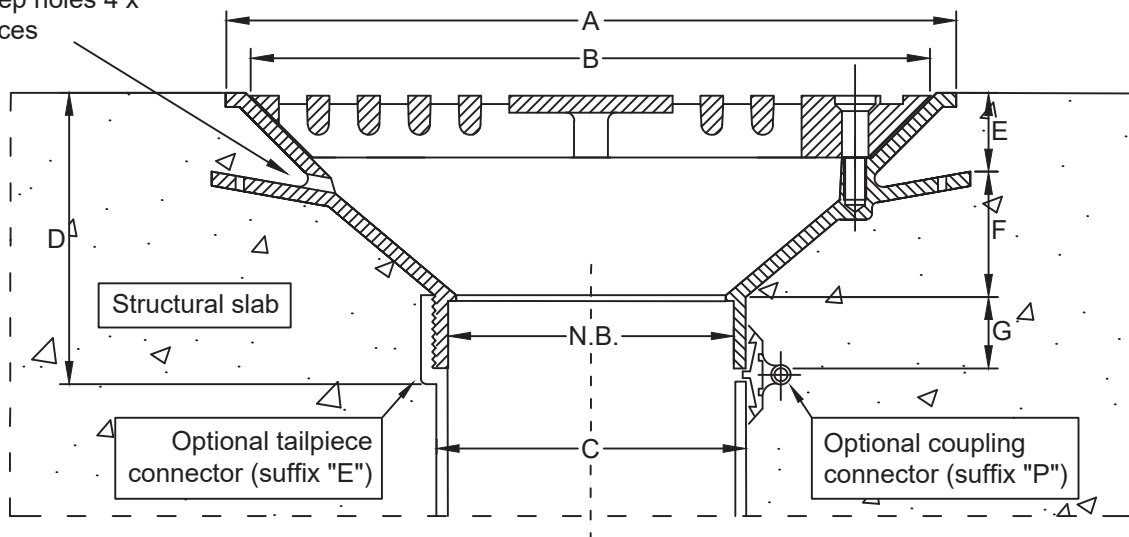

Dimensions (mm)

N.B	A	B	C	D	E	F	G
80	260	240	82	106	28	45	25
100	260	240	103	106	28	45	25
150	260	240	151	86	28	37	25

*For flow rate data please refer to appendix.

Metabronze Industries Ltd.

Office: 09 441 3824 Email: sales@metabronze.co.nz Website: metabronze.co.nz